Glacier II

96632427 GLAC2 L LED3 6000-840 HFIX EC BK GL OP

LED 45W GLCL_GL_OP_4K_HOG7 | IP20 | T_a25

Glacier II

A modern and efficient LED pendant luminaire. DALI dimmable control gear suitable for central battery emergency installations. Housing: die-cast aluminium with satin black finish. Reflector: opal glass with easy bayonet mount connection to housing. Class I electrical, IP20. Suspended via adjustable quick-lock 2.5m single wire suspension (supplied). Pre-wired with braided, flame retardent silicone cable, 5 x 0.75mm². Complete with 4000K LED

Dimensions: Ø340/140 x 485 mm
Luminaire input power: 45 W
Weight: 6.5 kg

TLG_GLCL_F_L_BKGLOP.jpg

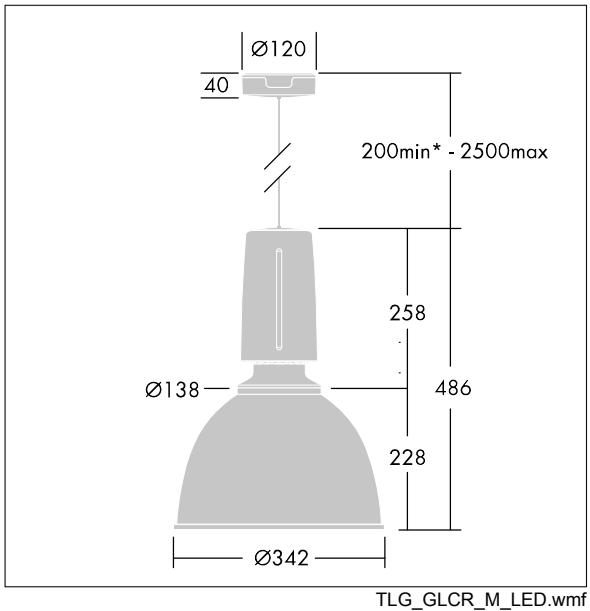

TLG_GLCR_M_LED.wmf

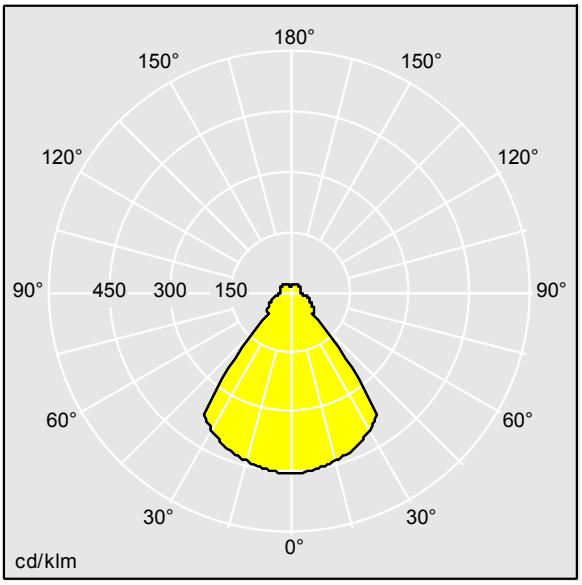

TLG_SP_0042939_G7.ldt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 6050 lm
Luminaire efficacy*: 134 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 28000666 LCA 45W 500-1400mA one4all C PRE
LOR: 1,00 ULOR: 0,16 DLOR: 0,84

Correlated colour temperature: 4000 Kelvin
Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L80 50000h at 25°C
Luminaire input power*: 45 W Power factor = 0.96
Dimming: DA2 dimmable to 1%
Maintenance category: C - Closed Top Reflector

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting